

Short link fishing chain / G80



This fishing chain has the mechanical values of G80.

Made with a special alloy steel, it is treated to minimize the risk of hydrogen embrittlement.

It is specially designed for fishing trawlers, but unsuitable for lifting applications.


100% proof loaded. Every single link tested.

Suitable for operating temperatures from -40 °C to +200 °C.

The chain is easy to assemble using connecting links or shackles.

Its pitch is also designed to accommodate quick links and other fittings between two adjacent chain-links.

A full operating manual is provided, for a product manufactured in Europe using European made alloy steel.

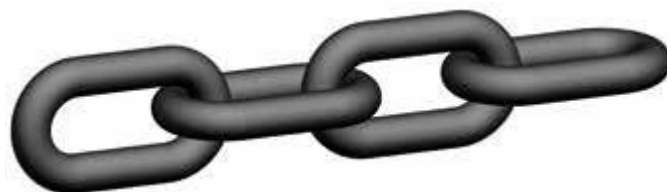

Vare nr.	Markings	Chain size metric Ø	Chain size imperial	BF breaking force	BF breaking force	Weight	Weight
Item No.		[mm]	[inch]	[kg]	[lbs]	[kg/mt]	[lbs/ft]
87097	A 8	10 x 40 x 15	3/8" x 1.5748 x 0.5906	12.600	27,778	1,98	1.09
75221	A 8	10 x 40 x 19	3/8" x 1.5748 x 0.7480	12.600	27,778	2,05	1.13
87098	A 8	13 x 52 x 19,5	1/2" x 2.0472 x 0.7677	21.200	46,738	3,35	1.85
87099	A 8	16 x 64 x 24	5/8" x 2.5197 x 0.9449	32.000	70,548	5,06	2.79
87101	A 8	19 x 76 x 29	3/4" x 2.9921 x 1.1417	44.800	98,767	7,20	3.97
76230		22 x 88 x 30	7/8" x 3.4646 x 1.1811	62.000	136,686	9,24	5.09
On Request		24 x 84 x 31	15/16" x 3.3071 x 1.2205	73.400	161,819	11,90	6.56
On Request		26 x 92 x 31	1" x 3.6226 x 1.2205	86.600	190,920	13,66	7.53