




Varenr.	Ref. ^a	Runnage			Knot Resistance	
		m/kg	ft/lb	tol.	kgf	tol.
-	mm					
	1,0	1700	2530		90	
	2,0	850	1265	± 5%	180	± 10%
	3,0	590	878		270	

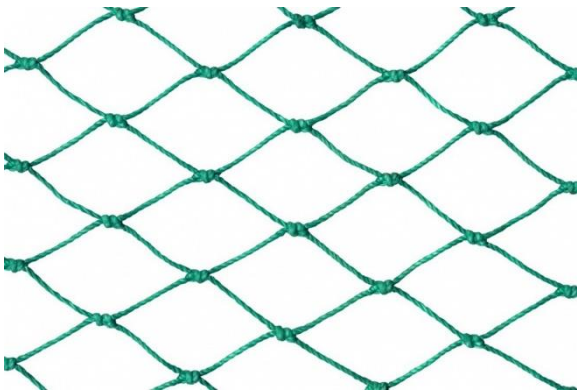

- **Very high tenacity knot;**
- **Very high resistance compared to twine diameter;**
- **Double knot prevents knot slippage and net distortion;**
- **Exclusive protecting coating;**
- **Thermo-stabilized for dimensional uniformity and stability of the meshes**