




Varenr.	Ref. <sup>a</sup>	Runnage		Knot Resistance	
		m/kg	tol.	kgf	tol.
-	mm				
	1,8	570		155	
	2,2	342		213	
	2,6	243		257	
	2,8	202		300	
	3,2	190		315	
	3,6	172		345	
	4	160		380	
	4,5	127	± 5%	490	± 10%
	5	100		580	
	5,5	68		790	
	6	60		880	
	7	50		950	
	8	40		1 200	
	9	28		1 850	

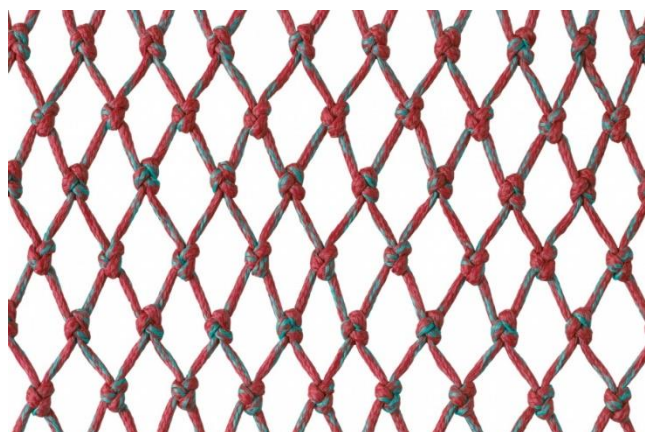

- *Soft twine easy to handle*
- *High braking strength*
- *High tenacity knot*
- *Superior abrasion resistance*
- *Untwisted knot*
- *Thermo-stabilized for dimensional uniformity and stability of the meshes*