




Varenr.	Ref. ^a	Appox. Diam.	Runnage		Knot Resistance	
			m/kg	tol.	kgf	tol.
-	#	mm				
	8842	1,8	581		95	
	8843	2	430		170	
	4840/3	2,5	280		250	
	4840/4	3,2	190		330	
	4840/5	4,1	105	± 5%	510	± 10%
	4840/6	4,4	90		545	
	4840/7	5,1	70		580	
	4840/8	5,8	50		820	
	4840/9	7,2	35		1 025	

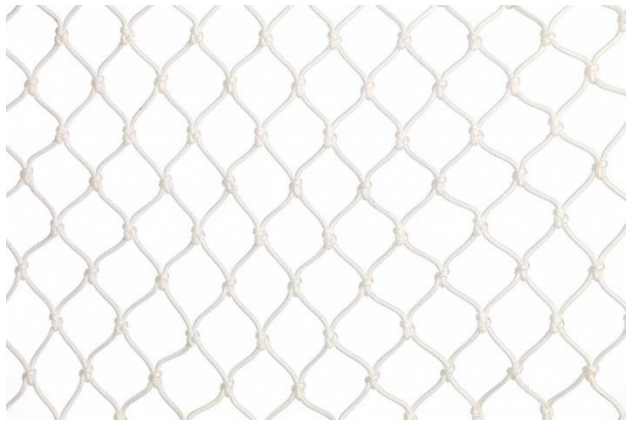

- **Braided construction;**
- **Good abrasion resistance;**
- **Excellent breaking load;**
- **High elasticity;**
- **Thermo-stabilized for dimensional uniformity and stability of the meshes;**
- **Possibility of a special coating upon request.**