




| Varenr. | Ref. <sup>a</sup> |     | Runnage |       |      | Knot Resistance |        |
|---------|-------------------|-----|---------|-------|------|-----------------|--------|
|         | #                 | mm  | m/kg    | ft/lb | tol. | kgf             | tol.   |
| -       | 12                | 1,3 | 1320    | 1964  |      | 17              |        |
|         | 15                | 1,4 | 1025    | 1525  |      | 20              |        |
|         | 18                | 1,5 | 850     | 1265  |      | 28              |        |
|         | 21                | 1,6 | 745     | 1109  |      | 32              |        |
|         | 24                | 1,8 | 642     | 955   |      | 37              |        |
|         | 27                | 1,9 | 570     | 848   |      | 42              |        |
|         | 30                | 2,0 | 518     | 771   |      | 45              |        |
|         | 33                | 2,1 | 470     | 699   |      | 49              |        |
|         | 36                | 2,2 | 430     | 640   | ± 5% | 54              | ± 10 % |
|         | 39                | 2,3 | 395     | 588   |      | 58              |        |
|         | 42                | 2,4 | 368     | 548   |      | 63              |        |
|         | 45                | 2,5 | 340     | 506   |      | 68              |        |
|         | 50                | 3,0 | 295     | 439   |      | 81              |        |
|         | 54                | 3,2 | 242     | 360   |      | 99              |        |
|         | 60                | 3,4 | 216     | 321   |      | 110             |        |
|         | 70                | 3,8 | 195     | 290   |      | 118             |        |
|         | 90                | 4,0 | 140     | 208   |      | 164             |        |

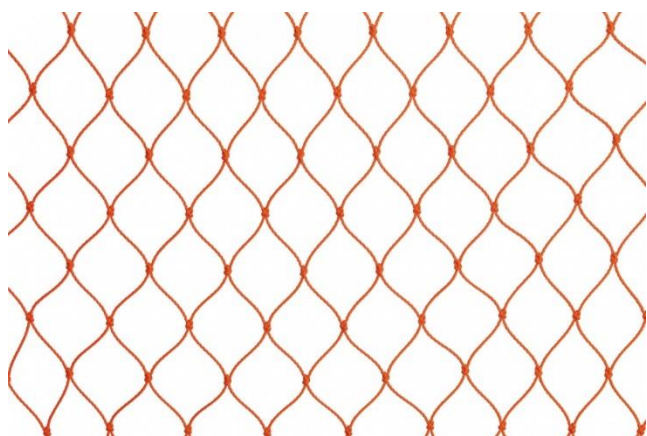

- *Twisted construction*
- *High-density Polyethylene*
- *Lightweight*
- *Good abrasion resistance*
- *Thermo-stabilized for dimensional uniformity and stability of the meshes*