




Varenr.	Ref. <sup>a</sup>	Runnage		Knot Resistance	
		m/kg	tol.	kgf	tol.
-	mm				
	1,2	750		90	
	1,8	560		120	
	2,2	370		165	
	2,6	260		230	
	2,8	215		275	
	3,2	190	± 5%	310	± 10%
	3,6	155		370	
	4	125		490	
	4,5	97		630	
	5	75		725	
	5,5	65		850	
	6	60		980	

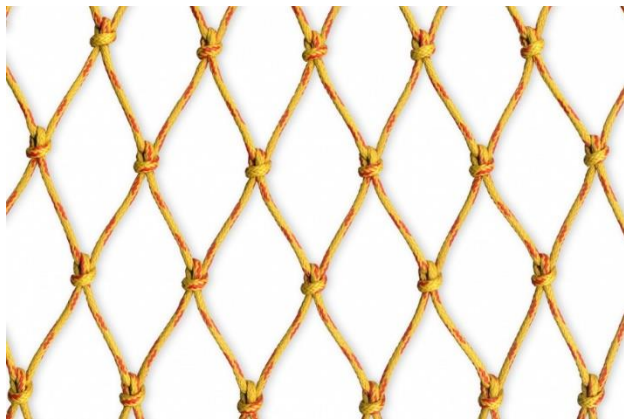

- *High-tenacity knot;*
- *Excellent abrasion and wear resistance;*
- *Low sand penetration;*
- *Thermo-stabilized for dimensional uniformity and meah stability*