




Varenr.	Ref. <sup>a</sup>	Runnage		Knot Resistance	
		m/kg	tol.	kgf	tol.
-	mm				
	1,2	760		75	
	1,5	700		80	
	1,8	600		90	
	2,2	380		148	
	2,6	270		203	
	2,8	225		245	
	3,2	200		285	
	3,6	162	± 5%	345	± 10%
	4	127		460	
	4,5	100		550	
	5	84		640	
	5,5	68		720	
	6	60		800	
	7	50		860	
	8	40		1 100	

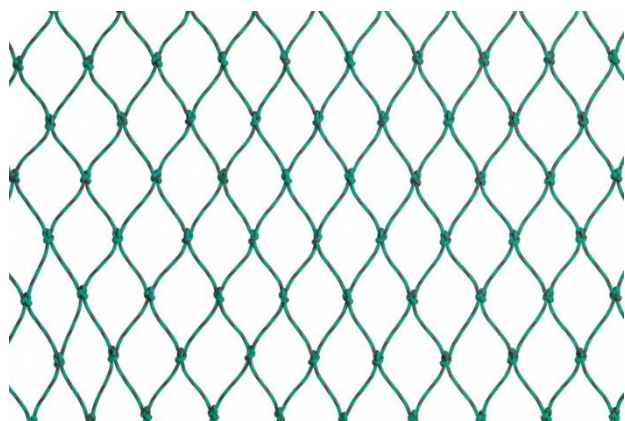

- *High-tenacity knot*
- *Excellent abrasion resistance*
- *Low sand penetration*
- *Thermo-stabilized for dimensional uniformity and stability of the meshes*