




Varenr.	Ref. <sup>a</sup>	Runnage		Knot Resistance	
		m/kg	tol.	kgf	tol.
-	mm				
	2.2	375		280	
	2.8	230		486	
	3.2	200		630	
	4.0	124	± 5%	772	± 10%
	5.0	90		1056	
	5.5	75		1190	

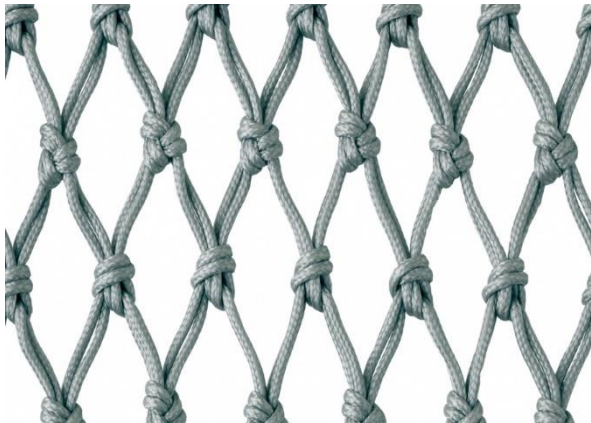

- *Compact twine-REDLINE construction with Dyneema® core;*
- *High tenacity knot;*
- *Thin and soft twines, very easy to handle;*
- *Low sand penetration;*
- *High breaking strength;*
- *Up to 30% reduction on twine diameter;*
- *Thermo-stabilized for dimensional uniformity and stability of the meshes*