



This fishing chain has the mechanical values of G80.

Made with a special alloy steel, it is treated to minimize the risk of hydrogen embrittlement.


It is specially designed for fishing trawlers, but unsuitable for lifting applications.

100% proof loaded up to 62,5% of its breaking force. Every single link is tested.

Suitable for operating temperatures from -40 °C to +200 °C.

The chain is easy to assemble using connecting links or shackles.

For this European manufactured chain, we provide a full operating manual and material traceability to the European made alloy steel.

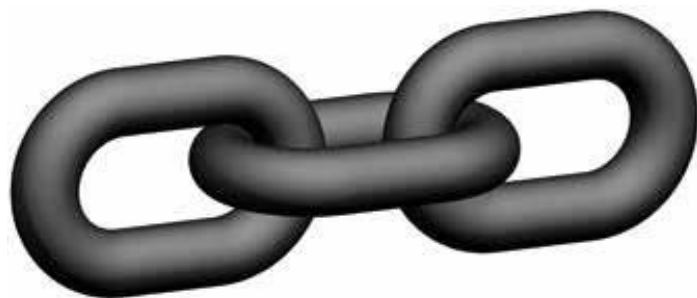

Vare nr. <i>Item No.</i>	Markings	Chain size metric $\varnothing$ <i>[mm]</i>	Chain size imperial <i>[inch]</i>	BF breaking force <i>[kg]</i>	BF breaking force <i>[lbs]</i>	Weight <i>[kg/mt]</i>	Weight <i>[lbs/ft]</i>
91232	A 8	7 x 21 x 10,5	9/32" x 0.8268 x 0.4134	6.000	13,228	1,10	0.61
91233	A 8	8 x 24 x 12	5/16" x 0.9449 x 0.4724	8.000	17,637	1,40	0.77
91230	A 8	10 x 30 x 14	3/8" x 1.1811 x 0.5512	12.500	27,558	2,20	1.21
91231	A 8	13 x 39 x 19	1/2" x 1.5354 x 0.7480	21.000	46,297	3,80	2.09
75239	A 8	16 x 48 x 23	5/8" x 1.8898 x 0.9055	32.000	70,548	5,70	3.14
75217	A 8	19 x 57 x 25	3/4" x 2.2441 x 0.9843	44.800	98,767	8,00	4.41
72753	A 8	22 x 66 x 29	7/8" x 2.5984 x 1.1417	61.100	134,702	11,00	6.06
29277	A 8	7 x 21 x 10,5	9/32" x 0.8268 x 0.4134	6.000	13,228	1,10	0.61
29284	A 8	8 x 24 x 12	5/16" x 0.9449 x 0.4724	8.000	17,637	1,40	0.77
29285	A 8	10 x 30 x 14	3/8" x 1.1811 x 0.5512	12.500	27,558	2,20	1.21
29286	A 8	13 x 39 x 19	1/2" x 1.5354 x 0.7480	21.000	46,297	3,80	2.09
29333	A 8	16 x 48 x 23	5/8" x 1.8898 x 0.9055	32.000	70,548	5,70	3.14